

NOTE:

- DRIVEWAYS SHALL BE CONSTRUCTED IN CONFORMANCE WITH THE AMERICANS WITH DISABILITIES ACT.

CEMENT CONCRETE
(SEE CONCRETE SIDEWALK SECTION)

SURFACE: 6" CEMENT CONCRETE

BASE: 8" GRAVEL BORROW

HOT MIX ASPHALT
(SEE ASPHALT SIDEWALK SECTION)

SURFACE: 1.5" CLASS I BIT. CONC. PAVEMENT
2.5" CLASS I BIT. CONC. BASE COURSE


BASE: 8" GRAVEL BORROW

LEGEND:

W = SIDEWALK WIDTH

* = TOLERANCE FOR CONSTRUCTION $\pm 0.5\%$

HSL = HIGH SIDE TRANSITION LENGTH (AS REQUIRED TO MEET 7.5% MAX SLOPE)

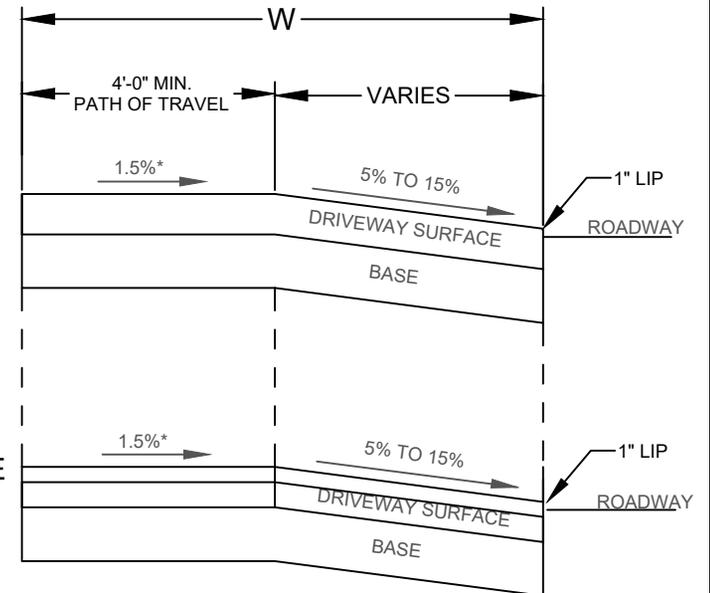

SECTION C-C



SIDEWALK THROUGH DRIVEWAY WITHOUT CURB RETURNS

City of Lowell Standard Specifications and Details

Spec. Ref #:

Date: 10/01/2025

Scale: N.T.S.