WALPOLE PLANTERS

LARGE RECTANGULAR PLANTER – MODLE # 2990022
18 3/4"H, 57"W, AND 24 1/4"D

SMALL SQUARE PLANTER – MODLE # 2990122
18 3/4"H, 31 1/2"W, AND 24 1/4"D

G / L-3 Large Wooden Planter

NOT TO SCALE

©PRESSLEY 2005

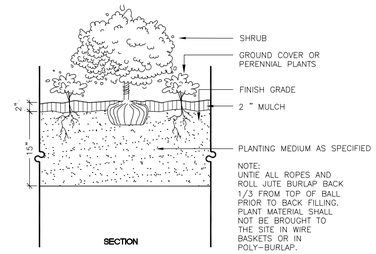

D / L-3 Shrub and Goundcover Planting

NOT TO SCALE

©PRESSLEY 2005

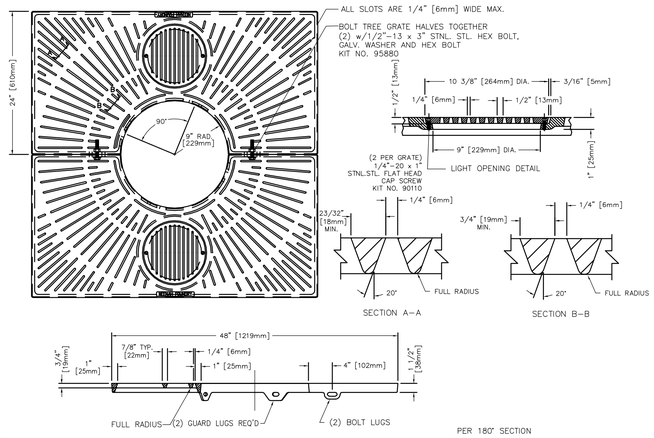

E / L-3 Neenah Tree Grate Model # R-8706-A

NOT TO SCALE

©PRESSLEY 2005

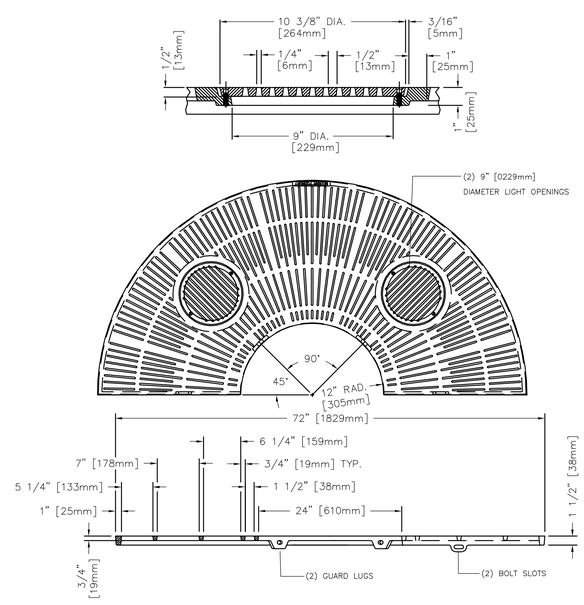

F / L-3 Neenah Tree Grate Model #R-8880-A

NOT TO SCALE

©PRESSLEY 2005

Schedule of Surface Finishes

SYMBOL	TYPE	CONSTRUCTION	REMARKS
A / L-3	Integral Color Concrete Paving - Pedestrian	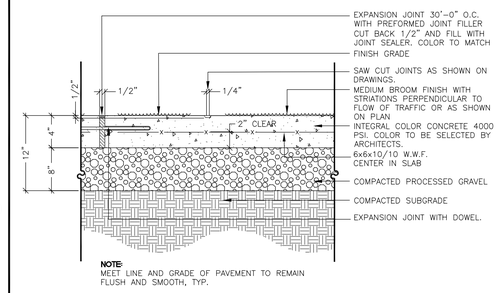 ©PRESSLEY 2005	NOT TO SCALE
B / L-3	Groundcover Planting	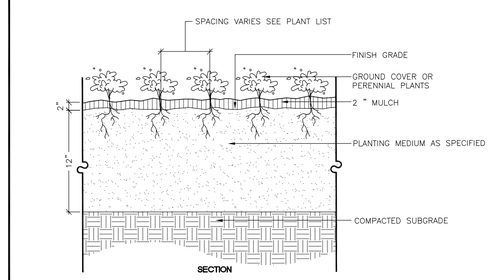 ©PRESSLEY 2005	NOT TO SCALE



DRILL CONCRETE SLAB AS REQ. DRILL TO ACCEPT STAINLESS STEEL THREADED ROD – FILL WITH NON SHRINK, GROUT FASTEN GRATE FRAME WITH STAINLESS STEEL NUT, GRIND OFF EXCESS.

INSERT 1

- SLOT WIDTH IS 3/8" MAXIMUM, SHALL MEET A.D.A. COMPLIANCE
- GRATE CAST FROM GRAY IRON
- GRATE OPENING SIZE ACCOMODATE WITH TREE TRUNK SIZE 16" OR 18" OR 28".
- STEEL ANGLE FRAME REQUIRED
- OUTER FRAME DIM. IS 7/8" ±1/8" GRATER THAN GRATE.
- GRATE BOLTED TO FRAME TWO SCREWS PER SECTION

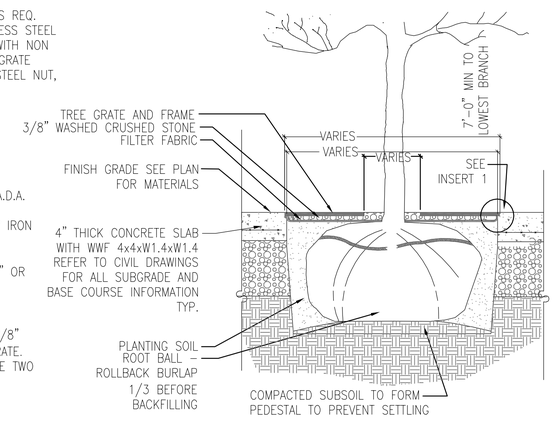

C / L-3 Deciduous Tree Planting in Grate

NOT TO SCALE

©PRESSLEY 2005

60% SUBMITTAL
May 2, 2005

JAM Parking Structure
101-115 Middlesex St.
City of Lowell, MA



Civil/Structural:
Parsons Brinckerhoff Quade & Douglas, Inc.
75 Arlington Street
Boston, MA 02116
Tel: 617-426-7330
Fax: 617-482-0642

Architecture:
Fennick McCredie Consultants

Survey:
Judith Nitsch Engineering

Landscape Architecture:
Pressley Associates

No.	Date	Revision

Job No.:	18913A
Drawn By:	MK
Checked By:	CK
Date:	5/2/05
Scale:	AS_SHOWN



KEY PLAN

SITE DETAILS

L-3